



# AY-F08

- Composite algorithm system with high speed operating.
- Embedded LINUX system, easy to integrate in to various system
- Standalone or network environment
- Professional access control system support real-time entrance logs transferring
- 24 hours continuous operation available
- Saves power during power outage
- With Strong seal appearance, anti-dust




## FALCO FINGERPRINT ACCESS SYSTEM

# Technical Specification

|                           |                                                                                                    |                                            |
|---------------------------|----------------------------------------------------------------------------------------------------|--------------------------------------------|
| LCD Display               | 4 lines Character white LCD 128*64                                                                 |                                            |
| Speaker                   | Voice Prompt (language can be selected)                                                            | No Voice Prompt                            |
| Fingerprint capacity      | 2,000 templates                                                                                    | 1,500 templates                            |
| Log capacity              | 50,000 records                                                                                     |                                            |
| Verification speed(1:1)   | ≤0.5s                                                                                              |                                            |
| Identification speed(1:N) | ≤1s                                                                                                |                                            |
| FRR                       | ≤0.01%                                                                                             |                                            |
| FAR                       | ≤0.0001%                                                                                           |                                            |
| Communication             | TCP/IP, RS232/485, USB Host/Client, Wiegand in/out                                                 | TCP/IP, RS232/485, Wiegand out             |
| Attendance Status         | Check in, Check out                                                                                |                                            |
| Language                  | Multi Language, English, French, Spanish, Arabic, etc., for more than 15 languages can be selected |                                            |
| Operation temperature     | 0°C ~ 45°C                                                                                         |                                            |
| Operation humidity        | 20% ~ 80%                                                                                          |                                            |
| Power                     | 110/220VAC ~ 12VDC                                                                                 |                                            |
| Machine Size              | 210(L)*95.5(W)*46.5(H)mm                                                                           |                                            |
| Function support          | Scheduled bell, T9 input, USB, Anti-pass back, multiple alarm, Webserver, SMS                      | T9 input, multiple alarm                   |
| Access control            | Built-in relay, with 50 time zones, 5 groups and 10 combinations                                   | Built-in relay, with simple access control |
| Customize Function        | Fingerprint capacity enlargement, 9PIN user ID, Auto Status                                        |                                            |

## Standalone

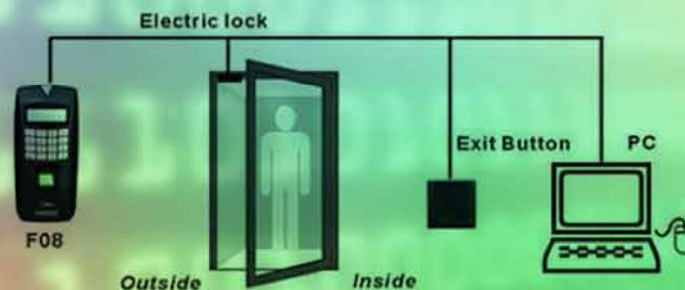

## Network

